

TOWN OF OLIVE  
West Shokan, N.Y. 12494

DOMENICK COVELLO  
Building Inspector



P.O. Box 180  
West Shokan, N.Y.  
12494 657-2013

JOHN H. INGRAM  
BUILDING INSPECTOR

WOODSTOVE/FIREPLACE/CHIMNEY APPLICATION  
UL APPROVED STOVE PERMISSIBLE ONLY

OWNER: \_\_\_\_\_  
ADDRESS: \_\_\_\_\_

PHONE: \_\_\_\_\_  
SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_  
FIRE #: \_\_\_\_\_

PERSON INSTALLING AND/OR BUILDING: \_\_\_\_\_  
ADDRESS: \_\_\_\_\_

PHONE: \_\_\_\_\_

DATE OF INSTALLATION: \_\_\_\_\_

MAKE OF STOVE: \_\_\_\_\_

MODEL OF STOVE: \_\_\_\_\_

**IDENTIFICATION OF SUBJECT PROPERTY**

LOCATION: \_\_\_\_\_

TAX MAP DESIGNATION: SECTION \_\_\_\_\_ BLOCK \_\_\_\_\_ LOT \_\_\_\_\_

ESTIMATED COST: \_\_\_\_\_

**PERMIT FEE:**

PERMIT EXPIRES \_\_\_\_\_

DATE OF APPROVAL \_\_\_\_\_

BUILDING INSPECTOR \_\_\_\_\_

John Ingram  
Domenick Covello

WOOD STOVE/PELLET STOVE/FIREPLACE/CHIMNEY

OWNER \_\_\_\_\_ DATE \_\_\_\_\_

INSPECTED \_\_\_\_\_ INSPECTOR \_\_\_\_\_

BUILDING: BRICK \_\_\_\_\_ FRAME \_\_\_\_\_ STORIES \_\_\_\_\_ EGRESS \_\_\_\_\_

FAMILIES \_\_\_\_\_ TYPE OF HEAT \_\_\_\_\_ FUEL \_\_\_\_\_

HOT WATER \_\_\_\_\_

\*\*\*\*ANY "NO" ANSWER SERVES AS INDICATION OF LESS THAN SAFE CONDITIONS OR DESIRABLE CONDITION. THEY SHOULD BE SATISFACTORILY CORRECTED BEFORE APPROVAL IS GIVEN

YES NO

\_\_\_ \_\_\_ 1. IS THE STOVE IN SOUND CONDITION: NEW \_\_\_ USED \_\_\_  
OLD \_\_\_ POSSIBLE UNSAFE CONDITION \_\_\_\_\_

\_\_\_ \_\_\_ 2. LOCATION: IS THE STOVE LOCATED SO THAT IT WILL NOT BLOCK ANY EXITS, DOORS, PASSAGE WAYS?

\_\_\_ \_\_\_ 3. ARE PROPER TOOLS AVAILABLE FOR OPERATION:  
POKER \_\_\_ ASH BUCKET \_\_\_ SHOVEL \_\_\_ FIRE  
EXTINGUISHER \_\_\_\_\_

\_\_\_ \_\_\_ 4. ARE THERE SMOKE OR IONIZATION DETECTORS PROPERLY PLACE IN THE DWELLING?

\_\_\_ \_\_\_ 5. CLEARANCES: IS THE STOVE LOCATED 36" FROM COMBUSTIBLE SURFACES:  
FRONT \_\_\_\_\_, SIDE \_\_\_\_\_, REAR \_\_\_\_\_

\_\_\_ \_\_\_ 6. IF THIS CLEARANCE IS LESS THAN 36" IS THE COMBUSTIBLE WALL PROTECTED?

\_\_\_ \_\_\_ 7. IF PROTECTED, IS THE CLEARANCE IN COMPLIANCE WITH MANUFACTURERS APPROVED RECOMMENDATIONS?  
OWNER TO CHECK AND MAKE REQUIRED CORRECTION

\_\_\_ \_\_\_ 8. IS THE STOVE PIPE THE SAME SIZE OR LARGER THAT APPLIANCE FLUE CONNECTION?

\_\_\_ \_\_\_ 9. IS THE STOVE PIPE ASSEMBLED SO THAT THE CRIMPED END POINTS TOWARD THE STOVE SO THAT THE CREOSOTE AND MOISTURE WILL STAY INSIDE THE PIPE AND RUN BACK TO THE STOVE, RATHER THAN RUN OUTSIDE?


\*\*NOTE: IT MAY BE NECESSARY TO MAKE AN ADAPTOR OF 24 GAUGE OR HEAVIER PIPE TO ALLOW CRIMPED END TOWARD THE STOVE.

CONTINUED ON OTHER SIDE

YES NO

- \_\_\_ \_\_\_ 10. DO ALL HORIZONTAL RUNS OR STOVE PIPE RISE FROM THE STOVE TOWARD THE CHIMNEY?  
\*\*\*NOTE: NFPA RECOMMENDS 1/4" PER RT.
- \_\_\_ \_\_\_ 11. DOES THAT STOVE PIPE AVOID EXTENDING THROUGH ANY FLOOR OR CEILING?
- \_\_\_ \_\_\_ 12. ARE ALL JOINTS SECURED WITH CLAMPS OR SHEET METAL SCREWS?
- \_\_\_ \_\_\_ 13. ARE ALL SECTION OF STOVE PIPES 18" OR MORE FROM COMBUSTIBLES?
- \_\_\_ \_\_\_ 14. IS THE CHIMNEY A SUITABLE MASONRY CHIMNEY OR LISTED CLASS "A" FACTORY BUILT CHIMNEY\_\_\_\_\_
- \_\_\_ \_\_\_ 15. IS THERE 1" CLEARANCE FROM WOOD TO MASONRY CHIMNEY IF ON EXTENSION?
- \_\_\_ \_\_\_ 16. IS THERE 2" CLEARANCE FROM WOOD TO MASONRY CHIMNEY IF ON INTERIOR?
- \_\_\_ \_\_\_ 17. DOES THE CHIMNEY EXTEND AT LEAST 3 FEET ABOVE THE ROOF?
- \_\_\_ \_\_\_ 18. DOES THE CHIMNEY EXTEND AT LEAST 2 FEET THAN ANYTHING WITHIN 10 FEET?
- \_\_\_ \_\_\_ 19. IS THERE AT LEAST 12" OF MASONRY ABOUT THE PERIMETER OF THE THIMBLE?
- \_\_\_ \_\_\_ 20. IS THERE A CLEAN OUT LOCATED AT THE BASE OF THE CHIMNEY?
- \_\_\_ \_\_\_ 21. IS THE CLEAN OUT LOCATED AT THE BASE OF FACTORY BUILT CHIMNEY?
- \_\_\_ \_\_\_ 22. IS THERE A 5/8" FIRE CLAY LINER IN THE MASONRY CHIMNEY?
- \_\_\_ \_\_\_ 23. IS ONLY ONE NATURAL DRAFT BURNER ON THE FLUE?
- \_\_\_ \_\_\_ 24. IS THE CHIMNEY SEPARATE FROM THE ONE USED FOR VENTING CONVENTIONAL OIL OR GAS FURNACES?

# NFPA Minimum Clearances For Safe Installation

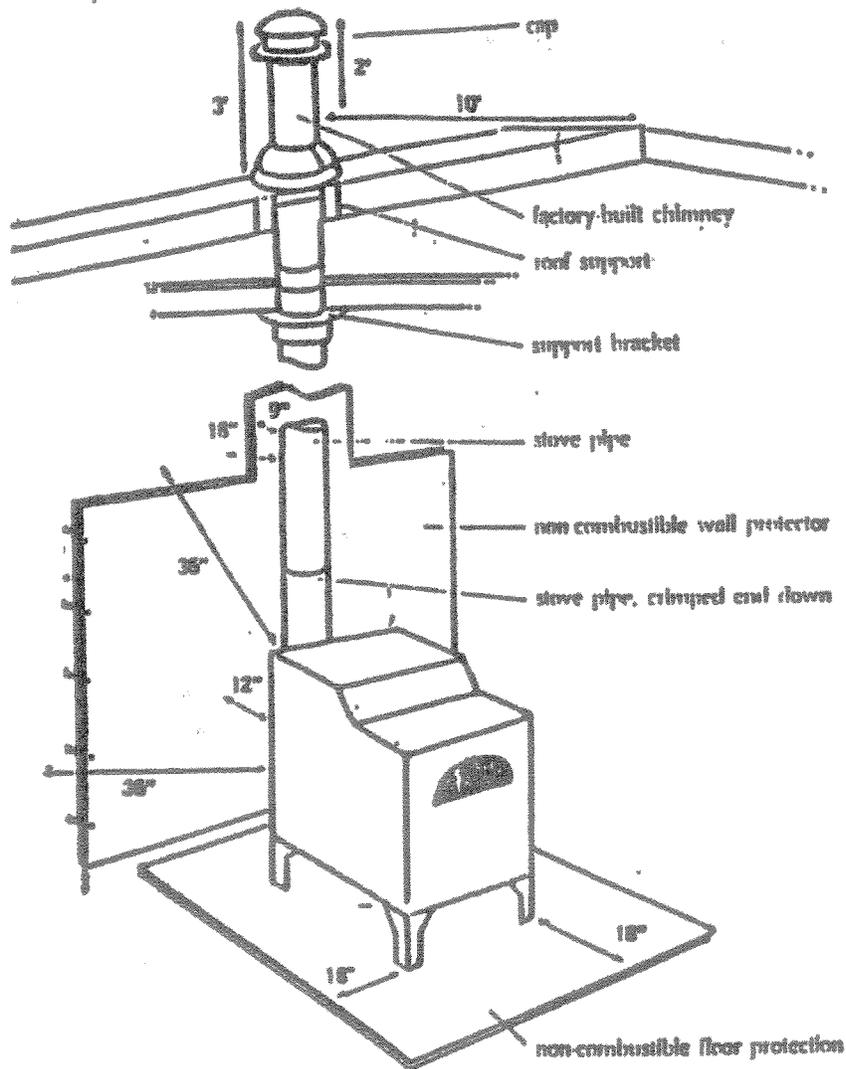

From	Combustibles	With 3/4" masonry wall or 24 gauge sheet metal with 1" airspace
<b>A. Listed Wood Heater</b>		
Front	36"	—
Side, Back	36"	12"
Top	36"	12"
<b>B. Single Wall Connector Pipe (24 gauge or heavier)</b>	18"	9"
<b>C. Chimney Height</b>	3 feet higher than roof; 2 feet higher than any part of roof within 10 feet (measured horizontally).	